


Installation Instructions For 16731

2000-2005 PONTIAC GRAND PRIX GTP 3.4L/3.8L V8

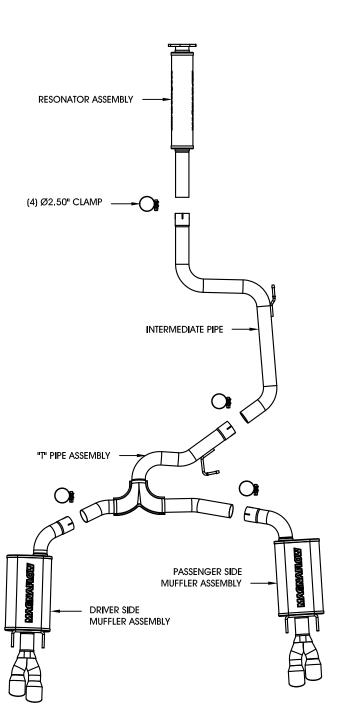

*MAGNAFLOW Performance Exhaust recommends professional installation on all their products

Warning: When working on, under, or around any vehicle exercise caution. Please allow the vehicle's exhaust system to cool before removal, as exhaust system temperatures may cause severe burns. If working without a lift, always consult vehicle manual for correct lifting specifications. Always wear safety glasses and ensure a safe work area. Serious injury or death could occur if safety measures are not followed.

Step 1: (Carefully read all instructions before installation) Disconnect the vehicle's battery before removal of the OEM exhaust. This will allow the computer to reset itself with the new system and prevent electrical accidents. Begin removing the OEM exhaust system by unbolting the OEM fasteners at the flange location behind the catalytic converter. Do not discard nor damage the OEM fasteners and rubber insulators, as they will be reused to mount the

new exhaust system. Disengage all the welded hangers from the OEM rubber insualtors.

Step 2: To install the new exhaust system, use a front to rear method. Using the OEM fasteners, install the resonator assembly at the flange location. Leave all fasteners and clamps loose for the final adjustment of the complete system. Using a 2.5" clamp, install the intermediate pipe then insert the welded hanger into the OEM rubber insulator. In a similiar fashion, install the "T" pipe assembly, driver's and passenger's side muffler assemblies.

Step 3: With all components mounted loosely, adjust the system for overall aesthetics and clearance of frame & bodywork. (MAGNAFLOW recommends at least 1/2" of clearance between the exhaust system and any body panels to prevent heat-related body damage or fire).

Step 4: Once a final position has been chosen for the new system, evenly tighten all fasteners from front to rear. The supplied band clamps must be VERY tight to properly align the pipes and prevent leaks (Approximately 40ft-lbs). Inspect all fasteners after 25-50 miles of operation and retighten if necessary.

Technical support: 1-800-959-9226 ext. 4500

MAGNAFLOW Performance Exhaust - 22961 Arroyo VIsta - Rancho Santa Margarlta, CA 92688